


Model: OLD DARK GRAY 33,3X100(A)
Codes: 100155775 - V14401461
Water absorption: BIII - Wall tiles ($10\% \leq E \leq 20\%$)
Thickness: 12 mm



MATE / MATT

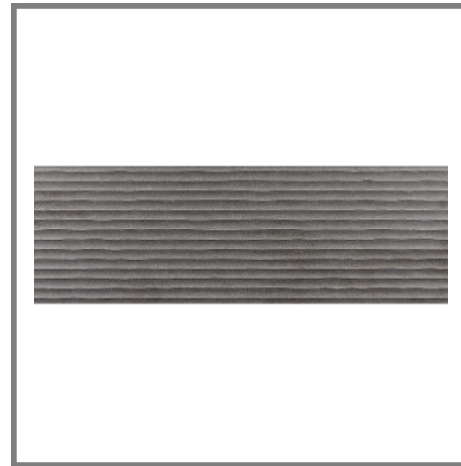

DESTONIFICADO
TONE VARIATIONS



DIMENSIONAL FEATURES

UNE-EN ISO 10545-2

Thickness	12 MM	
Width	332.8 MM	
Length	1000 MM	
Length and width deviation	Below 0.15%	$\leq 0.5\%*$
Side straightness deviation	Below 0.15%	$\leq 0.5\%*$
Squareness deviation	Below 0.15%	$\leq 0.6\%*$
Surface flatness deviation	Below 0.15%	$\leq 0.5\%*$

*ISO-13006:2012 UNE-EN 14411:2012

MECHANICAL FEATURES

UNE-EN ISO 10545-4-6-7-11

Breaking strength	1524 N	$>600\text{ N}*$
Abrasion resistance	No Aplica	
Crazing resistance	Resists 3 cycles	

*ISO-13006:2012 UNE-EN 14411:2012

HYGIENIC FEATURES

UNE-EN ISO 10545-13-14:1995

Chemical resistance	Class "A" for swimming pools and cleaning products (resists attack). Minimum Class "B" for acids and bases	CLASE B Min. *
Stain resistance	Class 5. Easy cleaning with water	CLASE 3 Min. *

*ISO-13006:2012 UNE-EN 14411:2012

SCOPE OF USE

Technical code-1	Use on walls	
------------------	--------------	--

ANTI-SLIP VALUE

UNE-ENV 12633:2003, DIN-51130 y ASTM C1028

Friction (dry)	No Aplica	
Friction (wet)	No Aplica	

*ISO-13006:2012 UNE-EN 14411:2012

PACKING

Boxes	0.999 M2/CS	
Pallets	54.945 M2/PAL	
Units	0.333 M2/ST	

System Certification



Do not use cleaning agents containing hydrofluoric acid.

It is recommended to fix tiles with a minimum joint of 1,5 mm. Do not fix without joint.

For big sizes, it is recommended to fix with mortars containing polymeric additives and to use the double glueing technique.

Mosaic tiles must be grouted.

This document is only commercial and cannot be used as expert opinion, documentary evidence or in any legal or administrative procedure unless authorized by PORCELANOSA S.A.